Color Box Camera

MTC-9352HQ, MTC-7351

SPECIFICATIONS

new

MTC-9352HQ

1/3" Super Hi-Res.
Color CCD Camera
SONY HQ1 / 540TVL
0.15Lux@F1.0
AES/AGC/BLC/F.L. Switchable(ON/OFF)

540 TVL | 0.15 Lux Min. Illumination | SONY HQ1

MTC-7351

1/3" SONY Color CCD
BLC/AGC/FL Switch(ON/OFF)

420 TVL | 0.2 Lux Min. Illumination

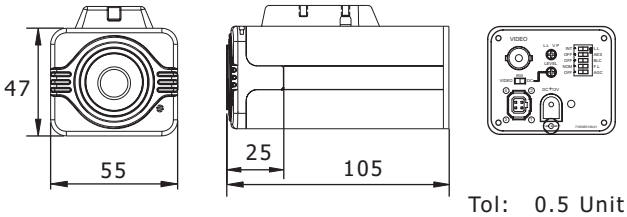

Tol: 0.5 Unit:mm

DIMENSIONS

	MTC-9352HQ		MTC-7351	
	PAL	NTSC	PAL	NTSC
Image Sensor	1/3" SONY Super HAD CCD			
DSP	SONY HQ1			
Number Of Total Pixels	795(H) X 596(V)	811(H) X 508(V)	537(H) X 597(V)	537(H) X 505(V)
Synchronizing System	Internal			
Resolution	540 TVL		420 TVL	
Minimum Illumination	0.15Lux@F1.0		0.2Lux@F1.2	
Electronic Shutter Speed Modes	AES ON: 1/50 (60)Sec. ~1/100,000sec. AES OFF: 1/50(60)sec.			
Back Light Compensation	ON/OFF (Switchable)			
Signal to Noise Ratio	More Than 50dB(AGC Off)			
F.L. (Flicker Less)	ON/OFF (Switchable)			
Automatic Gain Control	ON/OFF (Switchable)			
Auto Iris Control	Video / DC (Switchable)			
Auto White Balance	AWB			
Video Output	1Vp-p Composite / 75Ω			
Lens Mount	C/CS (With Adaptor)			
Power Supply	Standard:12Vdc; Option:24Vac, 110Vac, 230Vac,		12Vdc; 12Vdc/24Vac, 90~260Vac	
Power Consumption	2.0W		1.6W	
Operating Temperature	-10°C~+50°C/RH85% or less			
Dimensions	55(W) X 47(H) X 105(L)mm			
Weight	12Vdc:220g; 24Vac/110Vac/230Vac:470g			